



STRUCTAflor

Particleboard Flooring

NOW
800mm
WIDE

Guaranteed **5 months** exposure to the elements

- **More economical per m²**
- **800mm wide**
New sizing for: 19mm YELLOwtongue and; 22mm REDtongue.
- **Guaranteed for 5 months exposure**
The only particleboard flooring with 5 months guarantee.
- **11% lighter in weight per sheet**

ITEMS CHANGING TO 800MM WIDE

Please note the only change is to the width of the sheet, reducing it from 900mm to 800mm.

No change is being made to the length. Removing 100mm in width does not affect its ability to span 450mm (19mm) or 600mm (22mm) floor joists.

STRUCTAflor General Purpose Flooring

	Thickness	Length	Width	Coverage Area	Pack Size	Weight per Sheet	Max Joist Spacing
YELLOwtongue	19 mm	1800 mm	800 mm	1.44 m ²	30	18.5 kg	450 mm
YELLOwtongue	19 mm	3600 mm	800 mm	2.88 m ²	30	37 kg	450 mm
REDtongue	22 mm	3600 mm	800 mm	2.88 m ²	30	43 kg	600 mm

TERMIfloor Termite Protected Flooring

	Thickness	Length	Width	Coverage Area	Pack Size	Weight per Sheet	Max Joist Spacing
YELLOwtongue	19 mm	3600 mm	800 mm	2.88 m ²	30	37 kg	450 mm
REDtongue	22 mm	3600 mm	800 mm	2.88 m ²	30	43 kg	600 mm



Borg Manufacturing
1300 500 250
www.borgmanufacturing.com.au

THE FACTS THAT MATTER

➤ Resin Enriched Surface

Added weather protection during construction, for up to 5 months

➤ Australian Standard

Meets or Exceeds AS/NZS 1860.1

➤ Wax Impregnated

In-built moisture protection for cut sheets

➤ Edge Coat

Minimises moisture ingress, easy product identification; Yellow – STRUCTAflor / Red – TERMIflor / Blue – R-flor

HOW MANY SHEETS DO YOU NEED?

		Size of Floor (m ²)							
Width		10	25	50	75	100	150	200	250
800mm		4	9	18	27	35	53	70	87
		STRUCTAflor Sheet Sizes							
Width	Thick. x Length	Area							
800mm	19mm x 3600mm	2.88m ²							

KEY POINTS

■ Storage

When storing outside, ensure packs are kept clear off the ground. Cover with waterproof sheeting laid on timber battens so that air circulates freely between the waterproof cover and the product.

■ Exposure

The product may be exposed to the weather for up to 5 months. However, it is always advisable to enclose the building as soon as possible after laying the floor. During the exposure, prevailing weather conditions can influence the surface condition of the board and may cause minor swelling following the enclosure of the building, this can be removed by sanding. The depth of material removed shall not exceed the following:

- (1) 1mm – Over the general panel area
- (2) 2mm – Within 50mm of any supported edge

Remove any water that ponds on the platform by sweeping or by drilling holes (no larger than 8mm in diameter and no closer than 1 meter apart).

■ Installation


Adhesives:

Construction grade adhesive specifically formulated for particleboard flooring is to be used with Screw/Nail fixing. *SCREW fixing being the preferred method.*

Flexible adhesive allows for movement in building structure and minimises risk of Squeaky Floor.

Fixing pattern for 800mm wide flooring:

- 25mm from long edges
- 10mm from short edges
- Maximum 300mm spacing in sheet body
- Maximum 150mm spacing at sheet ends

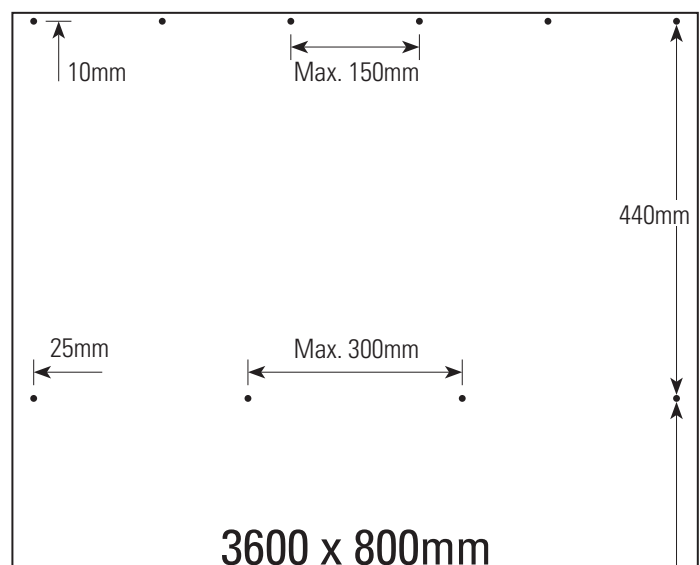

Please refer to our website for full installation guide. www.borgmanufacturing.com.au