


easyclad is recommended for use in high moisture areas (bathrooms) and semi-external (undercover) applications. It is made from 9.5mm reconstituted hardwood, has excellent environmental credentials and comes pre-primed on both sides with a commercial grade undercoat. It is available in smooth, VJ and regency profiles.

Specifications

Thickness	Length	Width	Weight (10.7kg/m ²)	Finish
9.5mm	2745mm	1200mm	32.9kg/sheet	Pre-primed
	3660mm	1200mm	43.9kg/sheet	Pre-primed

Profiles

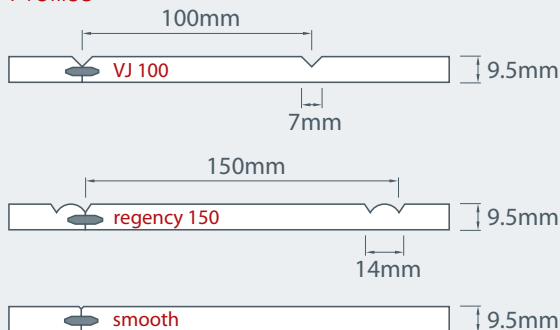

- Available in various patterns – VJ (stocked), Regency (made to order) & Smooth (made to order)
- Manufactured from 9.5mm Hardboard – contains no glues or resins
- Pre-undercoated finish on both sides requires minimal preparation before final painting
- Sizes are nominal and can vary slightly in width and length
- Impact resistant – saving on future maintenance and repairs
- *Easyjoin* system – no joint sealing required, better material usage
- Consistent board face – no knot holes, splitting, warping or splinters
- Easier and faster to install than timber planks or plasterboard

Suitable for

- Internal wall and ceiling linings
- Semi-external wall or ceiling linings undercover of roof or verandah
- Soffit linings

Note: easyclad is not suitable for fully exposed external applications or directly subjected to water. If being installed into a wet area refer to Guidelines for Installing Easycraft Wall Linings in Bathrooms, Laundries and Kitchens on our website.