


easyveneer will save you time and money when wanting to create feature timber walls or ceilings. No knots or the inconsistent quality of timber boards. This is the latest in modern timber veneer finishes available in smooth and VG (narrow VGroove) profiles.

Specifications

Material	Thickness	Length	Width	Weight (6.7 kg/m ²)	Finish
Hoop Ply	9mm & 12mm	2400mm	1200mm	19.3kg/sheet (9mm)	Raw or Lacquered*
Tas Oak	9mm & 12mm	2400mm	1200mm	19.3kg/sheet (9mm)	Raw or Lacquered*

*Lacquer finish is additional cost. **Profile type and centres to be confirmed on order.

Profiles

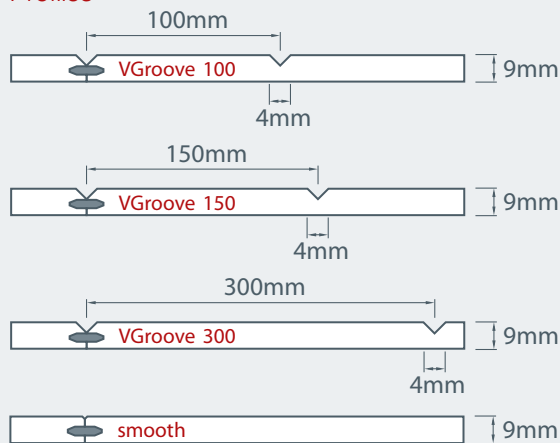

- Available in various centres, 100mm, 150mm & 300mm
- Tasmanian Oak veneer face on MDF base with lower grade on back (veneer can vary)
- Hoop Pine ply in AC & BB grades and 9mm & 12mm
- Ready for onsite varnish/staining or can be supplied clear lacquered ex factory
- Sizes are nominal and can vary slightly in width and length
- *Easyjoin* system – no joint sealing required, better material usage
- Consistent board face – no knot holes, splitting, warping or splinters
- Easier and faster to install than timber planks or plasterboard

Suitable for

- Internal wall and ceiling linings
- Semi-external (covered) ceilings
- A protective coating or stain must be applied for semi-external applications
- Special groove spacings are available on request - made to order

Note: **easyveneer** MDF must not be directly subjected to water. If being installed into a wet area refer to Guidelines for Installing Easycraft Wall Linings in Bathrooms, Laundries and Kitchens on our website. We recommend **easyclad** as the best suited base board for wet room applications.