

Predator Blade

Engineered for maximum timber cutting performance

Austsaw Predator blades have been engineered for maximum performance, giving up to 3x the life of a standard saw blade. Anti-friction coating prevents friction for smoother cutting and a superior quality finish. The heavy duty plate is built from the finest quality steel with a thin kerf design, giving you a fast, effortless cutting experience.

Designed to cut:

Wood

MDF

Chipboard

Plywood

Softwoods

Hardwoods



DIAMETER	TEETH	PRODUCT CODE	BORE/ BUSH mm	KERF / PLATE mm	TOOTH GRIND	RAKE	MAX SPEED rpm	BARCODE
136mm (5 3/8")	24	TBP1362024	20/ 16	1.5/ 1.0	ATAF 15°	20°	11,000	9313601002252
	36	TBP1362036	20/ 16	1.5/ 1.0	ATAF 15°	18°	11,000	9313601002269
160mm (6 1/4")	18	TBP1602018	20/ 16	1.5/ 1.0	ATAF 15°	20°	9,500	9313601002276
	24	TBP1602024	20/ 16	1.5/ 1.0	ATAF 15°	20°	9,500	9313601002283
	40	TBP1602040	20/ 16	1.5/ 1.0	ATB 15°	18°	9,500	9313601002290
185mm (7 1/4")	24	TBP1852024	20/ 16	1.8/ 1.0	ATB 15°	15°	9,500	9313601002306
	40	TBP1852040	20/ 16	1.6/ 1.0	ATB 15°	18°	8,000	9313601002313
190mm (7 1/2")	40	TBP1902040	20	2.0/ 1.2	ATAF 12°	5°	8,000	9313601002320
210mm (8 1/4")	20	TBP2102520	25/ 16	1.8/ 1.0	ATB 15°	18°	7,000	9313601002337
	40	TBP2102540	25/ 16	1.8/ 1.0	ATB 15°	15°	7,000	9313601002344
216mm (8 1/2")	60	TBP2163060	30/ 15.88	2.0/ 1.3	ATB 12°	5°	7,000	9313601002351
235mm (9 1/4")	20	TBP2352520	25	1.8/ 1.2	ATB 15°	18°	6,500	9313601002368
	40	TBP2352540	25	1.8/ 1.2	ATB 15°	15°	6,500	9313601002375
	60	TBP2352560	25	1.8/ 1.2	ATB 15°	15°	6,500	9313601002382
255mm (10")	40	TBP2553040	30/ 25.4	2.3/ 1.5	ATB 12°	5°	6,000	9313601002399
	40	TBP2553040T*	30/ 25.4	2.8/ 2.0	ATB 12°	18°	6,000	9313601002429
	60	TBP2553060	30/ 25.4	2.3/ 1.5	ATB 12°	5°	6,000	9313601002405
	80	TBP2553080	30/ 25.4	2.3/ 1.5	ATB 12°	5°	6,000	9313601002412
	80	TBP2553080T*	30/ 25.4	2.8/ 2.0	ATAF12°	15°	6,000	9313601002436
305mm (12")	40	TBP3053040	30/ 25.4	2.3/ 1.6	ATAF 12°	5°	5,000	9313601002443
	60	TBP3053060	30/ 25.4	2.3/ 1.6	ATAF 12°	5°	5,000	9313601002450
	100	TBP30530100	30/ 25.4	2.3/ 1.6	ATAF 12°	5°	5,000	9313601002467


T* Use with tablesaw

Predator Pro Blade

Engineered for extreme timber cutting performance

Austsaw Predator Pro blades have been engineered for extreme performance, giving up to 6x the life of a standard saw blade. Anti-friction Teflon® coating means less gumming and pitch build up providing a superior quality finish. The heavy duty laser cut plate is built from premium European hi-density carbide steel, giving you extreme durability and cutting life.

Designed to cut:

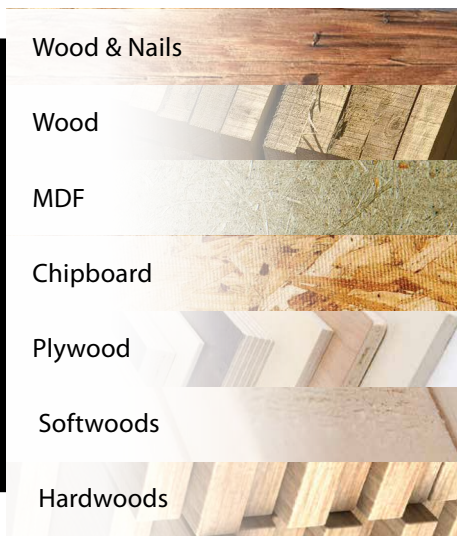

DIAMETER	TEETH	PRODUCT CODE	BORE/ BUSH mm	KERF / PLATE mm	TOOTH GRIND	RAKE	MAX SPEED rpm	BARCODE
136mm (5 3/8")	24	TBPP1362024	20/ 16	1.5/ 1.0	ATAF 15°	20°	11,000	9313601002474
	36	TBPP1362036	20/ 16	1.5/ 1.0	ATAF 15°	18°	11,000	9313601002481
160mm (6 1/4")	18	TBPP1602018	20/ 16	1.5/ 1.0	ATAF 15°	20°	9,500	9313601002498
	24	TBPP1602024	20/ 16	1.5/ 1.0	ATAF 15°	20°	9,500	9313601002504
	40	TBPP1602040	20/ 16	1.5/ 1.0	ATB 15°	18°	9,500	9313601002511
185mm (7 1/4")	24	TBPP1852024	20/ 16	1.8/ 1.0	ATB 15°	15°	8,000	9313601002528
	24	TBPP1852024B*	20/ 16	1.8/ 1.0	ATB 15°	15°	8,000	9313601002535
	40	TBPP1852040	20/ 16	1.6/ 1.0	ATB 15°	18°	8,000	9313601002542
190mm (7 1/2")	40	TBPP1902040	20	2.0/ 1.2	ATAF 15°	5°	8,000	9313601002040
210mm (8 1/4")	20	TBPP2102520	25/ 16	1.8/ 1.0	ATB 15°	18°	7,000	9313601002566
	40	TBPP2102540	25/ 16	1.8/ 1.0	ATB 15°	15°	7,000	9313601002573
216mm (8 1/2")	60	TBPP2163060	30/ 15.88	2.0/ 1.2	ATB 15°	5°	7,000	9313601002580
235mm (9 1/4")	20	TBPP2352520	25	1.8/ 1.2	ATB 15°	18°	6,500	9313601002597
	20	TBPP2352520B*	25	1.8/ 1.2	ATB 15°	18°	6,500	9313601002603
	40	TBPP2352540	25	1.8/ 1.2	ATB 15°	15°	6,500	9313601002610
	60	TBPP2352560	25	1.8/ 1.2	ATB 15°	15°	6,500	9313601002627
255mm (10")	40	TBPP2553040	30/ 25.4	2.3/ 1.5	ATB 15°	5°	6,000	9313601002634
	40	TBPP2553040T*	30/ 25.4	2.8/ 2.0	ATB 15°	18°	6,000	9313601002665
	60	TBPP2553060	30/ 25.4	2.3/ 1.5	ATB 15°	5°	6,000	9313601002641
	80	TBPP2553080	30/ 25.4	2.3/ 1.5	ATB 15°	5°	6,000	9313601002658
	80	TBPP2553080T*	30/ 25.4	2.8/ 2.0	ATAF 15°	15°	6,000	9313601002672
305mm (12")	60	TBPP3053060	30/ 25.4	2.3/ 1.6	ATAF 15°	5°	5,000	9313601002689
	100	TBPP30530100	30/ 25.4	2.3/ 1.6	ATAF 15°	5°	5,000	9313601002696

T* Use with tablesaw

B* Available in 20 Blade Display Box