
Hollow Wall Anchors



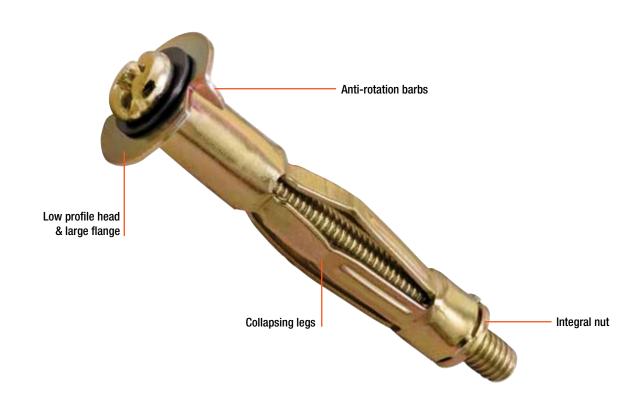


Description

The Ramset[™] Hollow Wall Anchor is an all metal, light duty, cavity fixing for plasterboard and other hollow wall materials up to 38mm.

Specification

opcomoation			
Material	Pressed Steel Body, Carbon Steel Screw		
Corrosion Protection	Zinc Plating		
Head Style	Slotted Philips Button Head		
Fixing Method	Fixture Aligned		
Setting Method	Setting Tool/Rotation		
Anchoring Method	Deformation		
Thread Diameters	M4, M5, M6		
Drilled Hole Diameters	8mm, 9mm, 13mm		
Wall Thickness'	0mm-5mm, 6mm-10mm, 6mm-16mm,		
	8mm-13mm, 16mm-24mm, 34mm-38mm		
Maximum Fixture Thickness' 10mm, 15mm, 17mm, 20mm, 22mm			
Substrates	Plasterboard Ply Wood Cement Sheet		

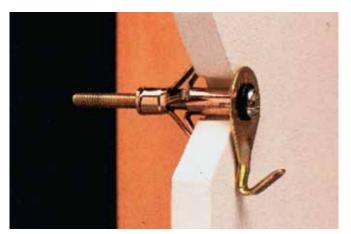

Features & Benefits

- The Hollow Wall Anchor's low profile head allows for flush finishing.
- The anchor's large flange prevents the head from pulling into the substrate.
- Anti-rotation barbs, incorporated in the flange, prevent the anchor from spinning in the hole.
- Collapsing legs with an integral nut provide high strength and allow the screw to be removed without loosing the anchor inside the cavity.

Related Products

Drill Drill Bits Drill Driver Screw Gun Screwdriver Bits Hollow Wall Anchor Setting Tool




Trades & Applications


	Miscellaneous Trades	Plumbing Contractor	Electrical Contractor	
Light Hook/Bracket Installation	✓			
Electrical Fitting Installation			✓	
Pipe/Conduit Saddle Installation		✓	✓	


Installation

- 1. Drill a hole to the recommended diameter. (HW10M4P may be hammered into plasterboard)
- 2. Tap the anchor into the hole until it is flush with the surface of the substrate.
- 3. Attach the setting tool to the head of the screw. Squeeze the trigger to expand the anchor. (Small sizes may be set using a screwdriver)
- 4. Remove the screw and place it through the fixture then back into the anchor. Tighten the screw until the fixture is fixed.













Hollow Wall Anchor

Part No	Thread	Wall	Max Fixture	Drilled Hole	Order
	Size	Thickness (mm)	Thickness (mm)	Ø (mm)	Qty
HW05M4	M4	0 - 5	10	8	100
HW10M4	M4	6 - 10	15	8	100
HW10M4P	M4	6 - 10	17	8	100
HW13M4	M4	8 - 13	15	8	100
HW24M4	M4	16 - 24	17	8	100
HW38M4	M4	34 - 38	15	8	100
HW14M5	M5	8 - 13	20	9	100
HW16M6	M6	6 - 16	22	13	100

Hollow Wall Anchor - Setting Tool

Part No	Description	Order Qty
SETHWG	Setting Tool	1

